rond × DE Oude SCHAKELAAR

adjustable plaster ring (unifit type E/F)
installation instruction

1

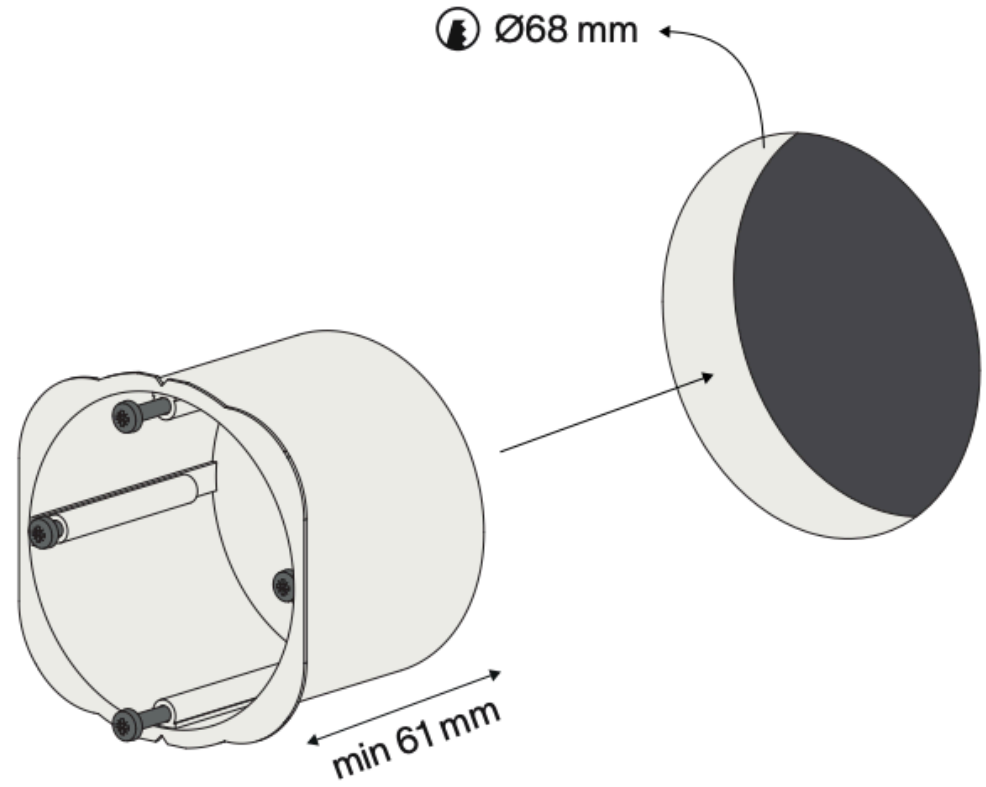

or

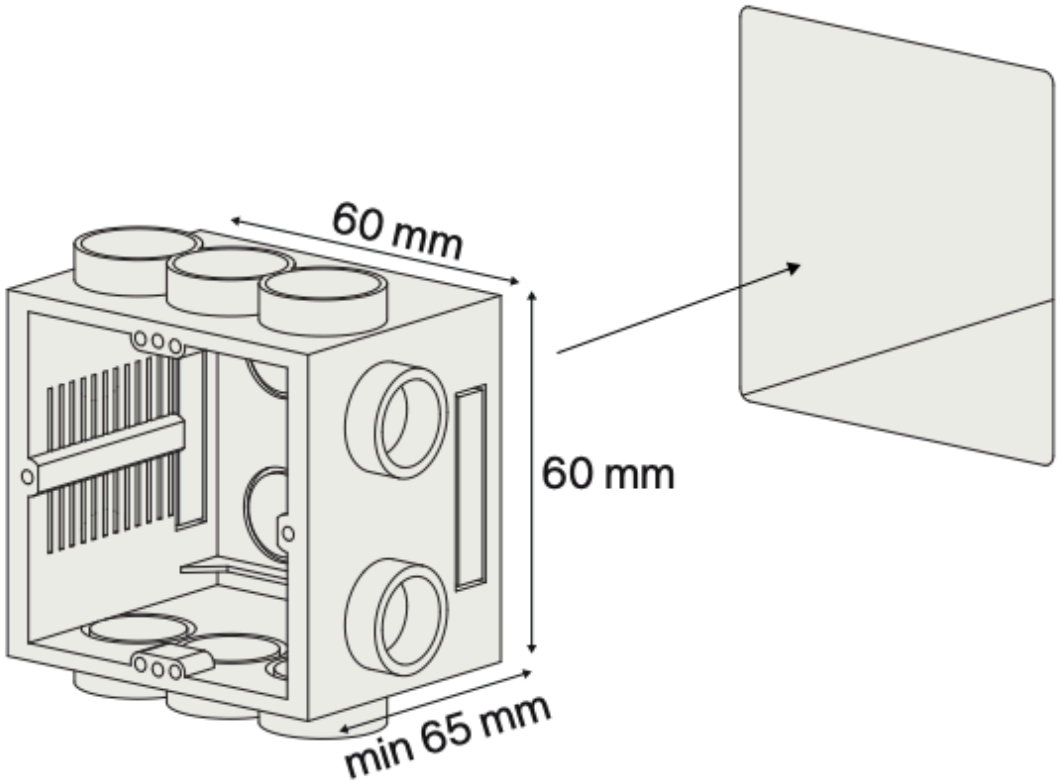

Install the junction box.

2

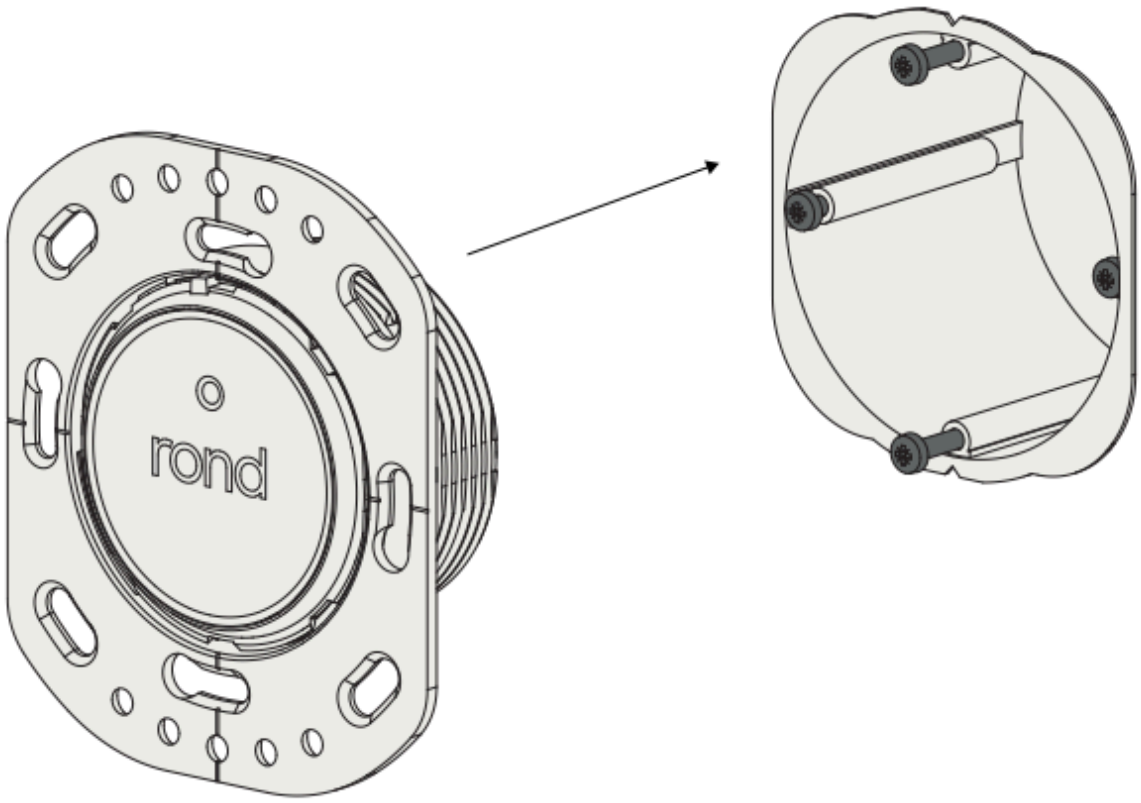

Install the plaster ring in the junction box.

3

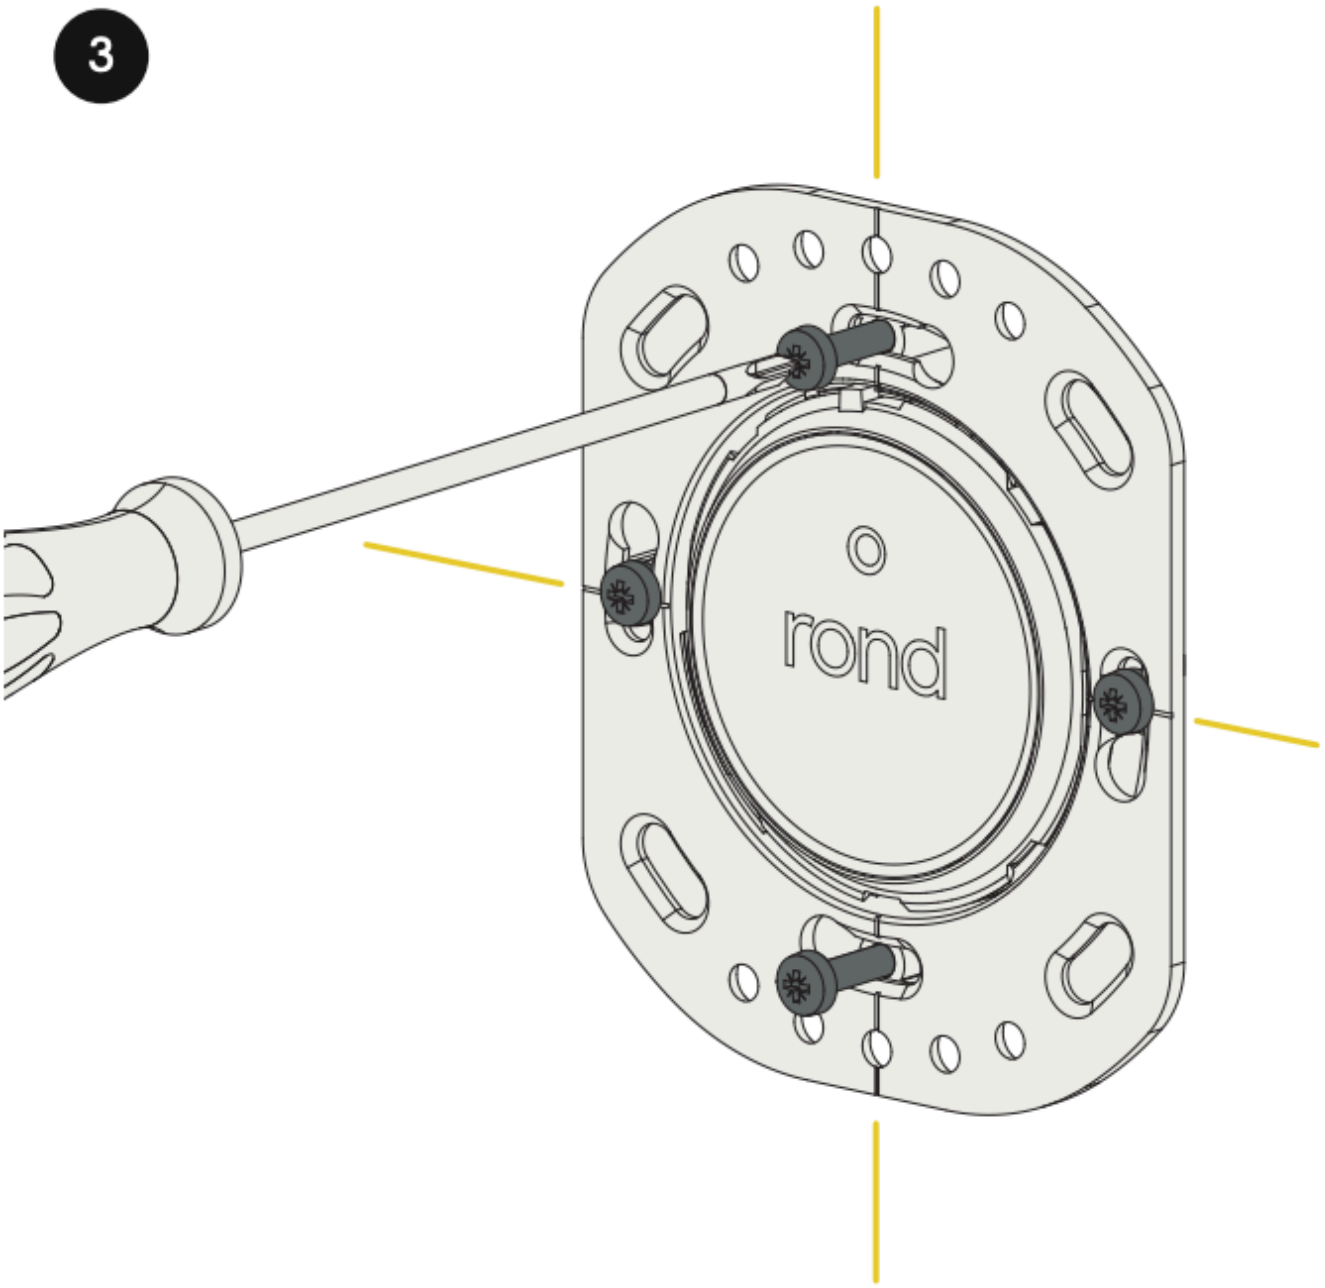

Level the plaster ring and fasten the screws.

4

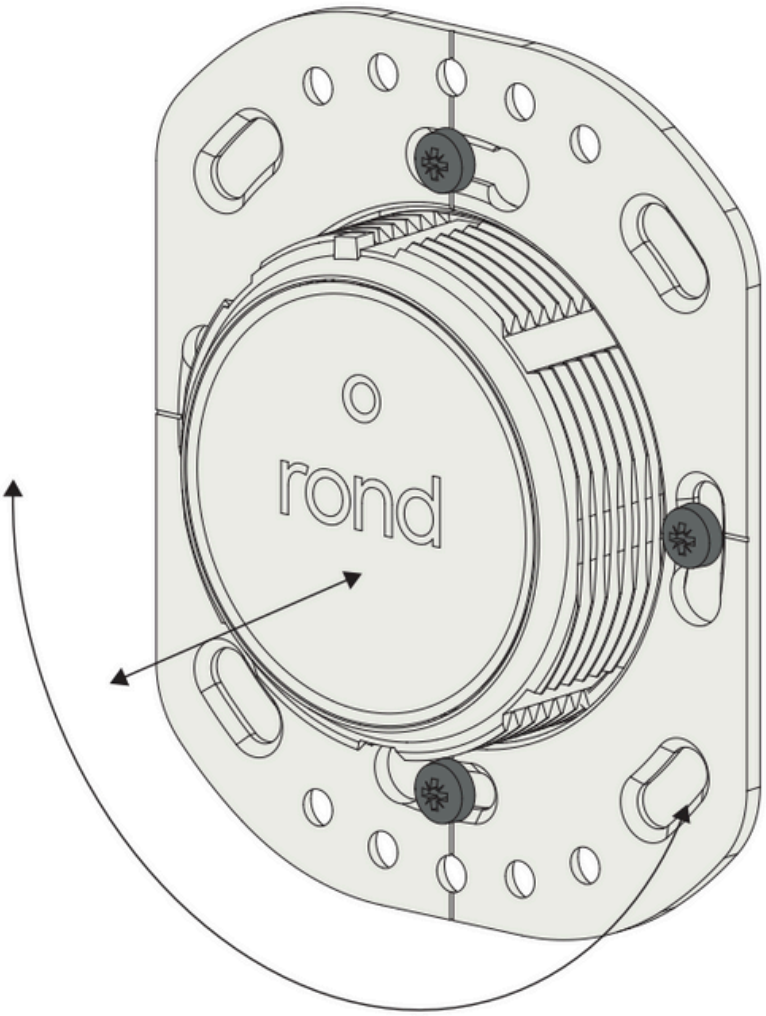

Adjust the height of the ring to the desired plaster thickness by twisting the middle part.

5

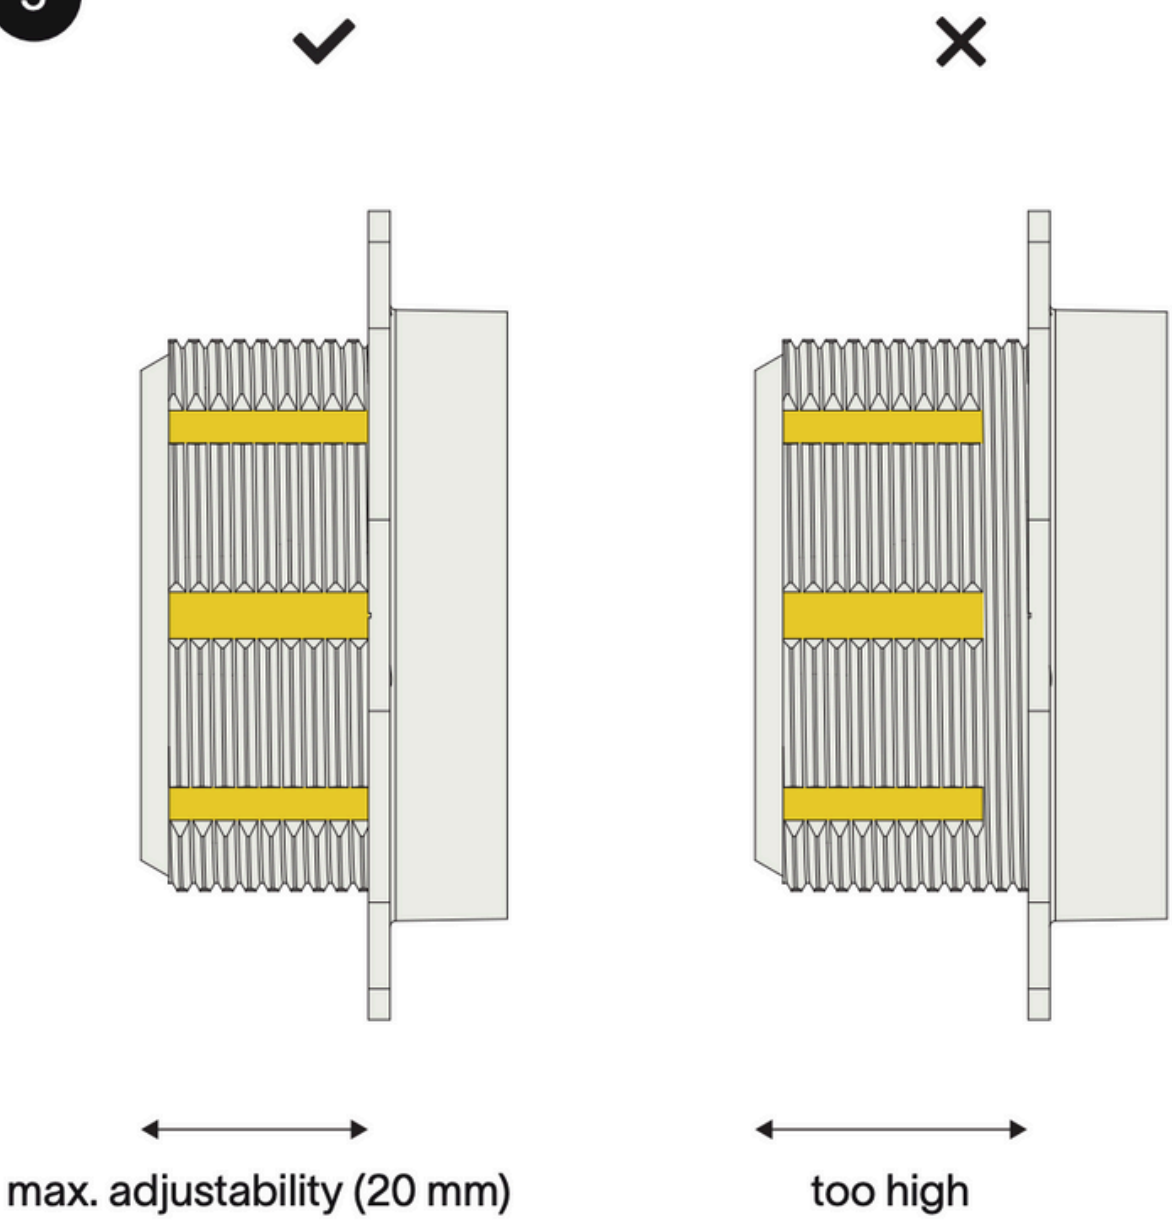

Respect the maximum adjustability of 20 mm when adjusting the height.

6

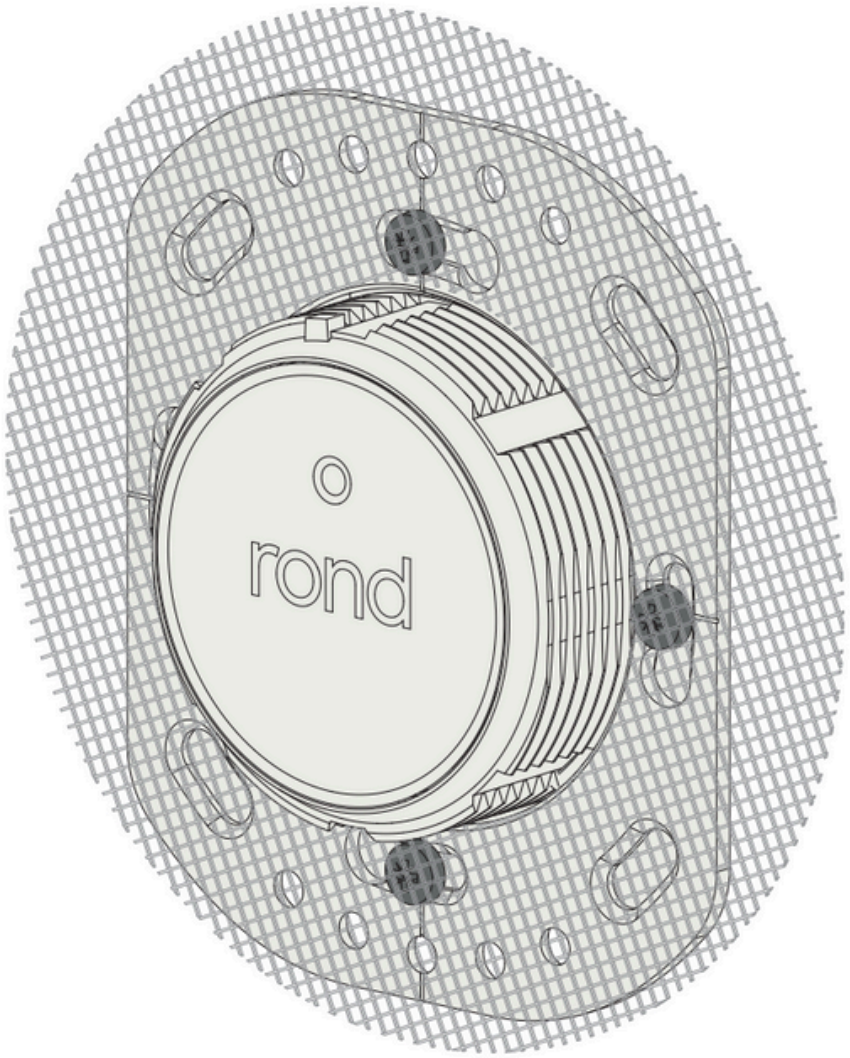

Use a fiberglass mesh tape for optimal plaster adhesion.

7

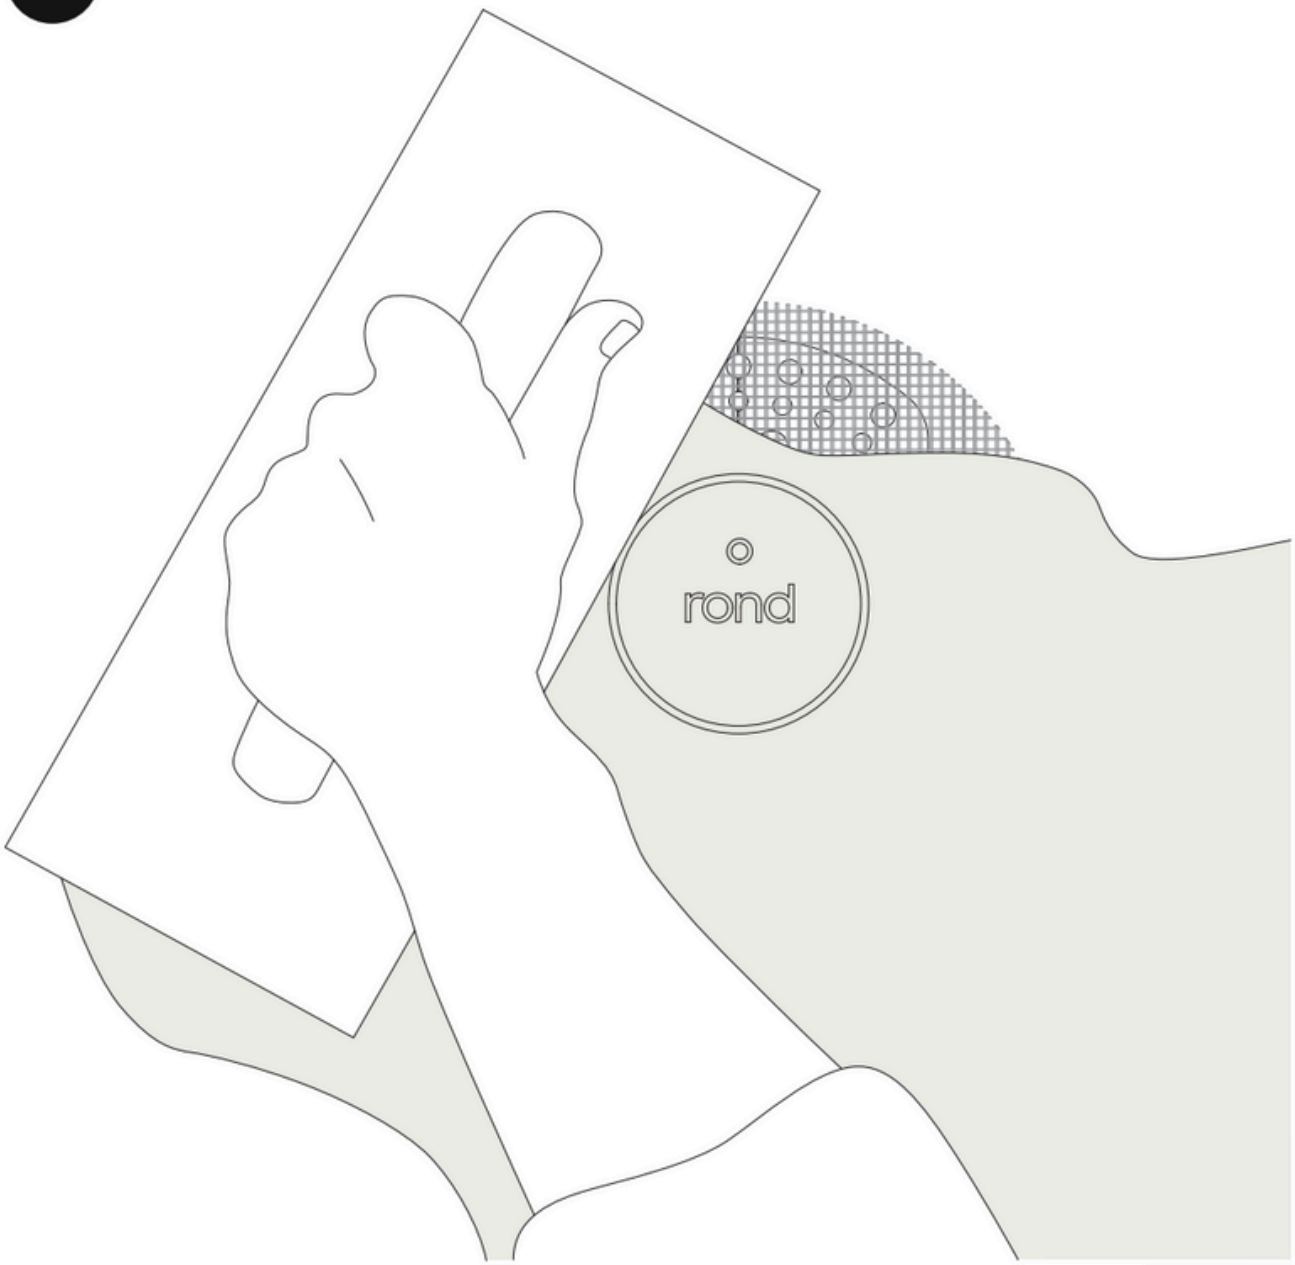

Excercise caution while plastering, do not damage the ring. Keep the plaster lid inside the plaster ring while plastering.

8

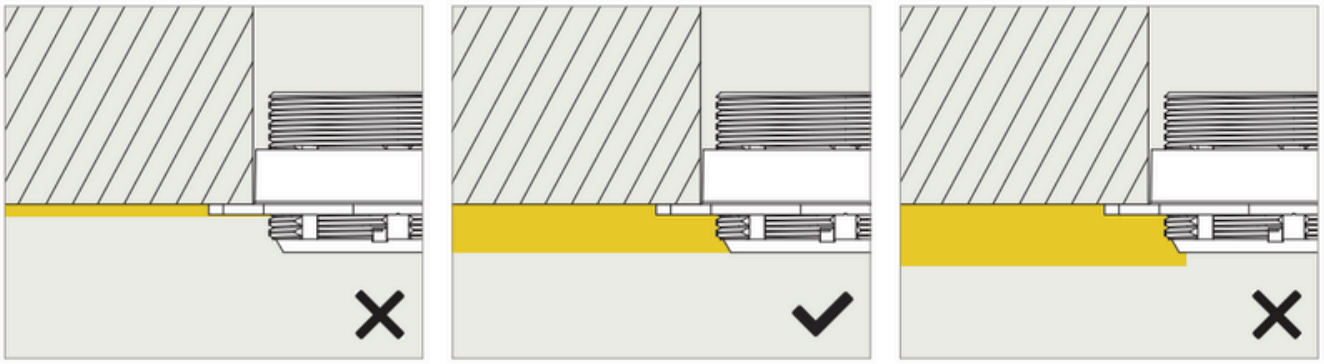

not enough plaster perfect amount of plaster too much plaster

Make sure not to touch the edge of the ring when sanding.

thank you for choosing rond

rond × DE Oude SCHAKELAAR

Installation must be done by skilled professionals only and instructions must be followed at all times. Warranty will not apply in case of wrongful use of if unskilled personnel attempts to repair a product.